




All Pages Of This Edition Approved

Signature:

Date:

由 Autodesk 教育版产品制作


REV.	DESCRIPTION	REVISER	DATE
A0	New Release	Liu Gong	2019-3-4
A1	更改显示内容，FPC上增加一个SEG定义	Liu Gong	2019-3-12
A2	更改显示内容，更改参数，更改PIN定义，更改FPC长度	Liu Gong	2019-4-9

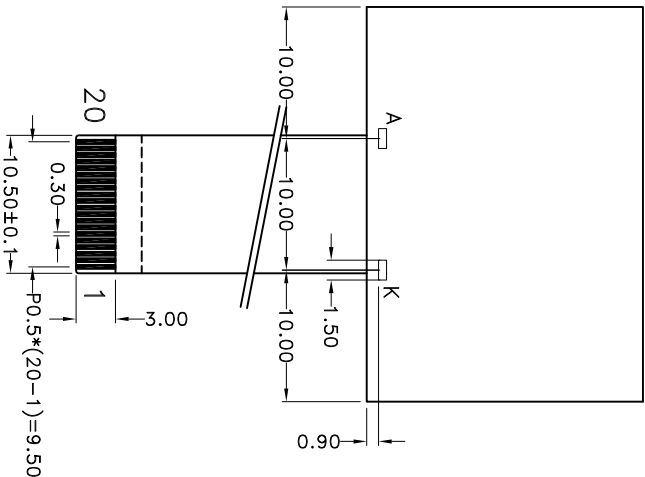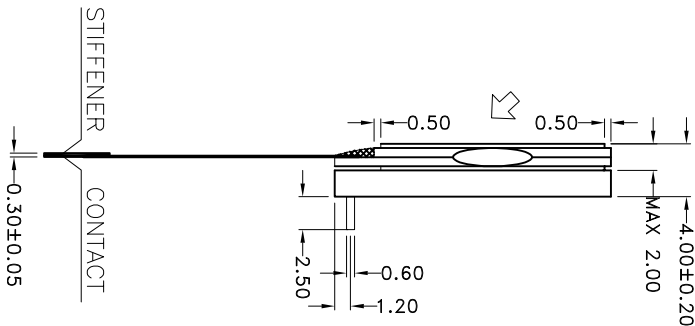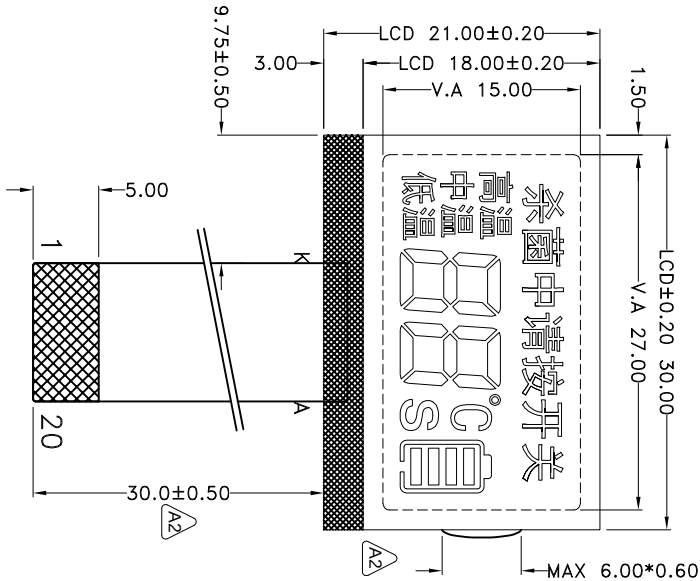

PIN	SYMBOL
1	NC
2	NC
3	NC
4	COM1
5	COM2
6	COM3
7	COM4
8	SEG1
9	SEG2
10	SEG3
11	SEG4
12	SEG5
13	SEG6
14	SEG7
15	NC
16	NC
17	NC
18	NC
19	NC
20	NC

Specifications:

1. Display Mode: VA/Black/Negative/Transmissive.
2. Viewing Angle: 12 O'clock.
3. Drive Method: 1/4Duty, 1/2Bias, VLCD=3.3±0.2V.
4. Backlight Type: White, 3.0±0.2V, 30mA, 2pcs.
5. Operating Temp: 0°C~+50°C.
6. Storage Temp: -10°C~+60°C.
7. Connector: FPC
8. Drive IC: None
9. Customer P/N: --
10. Unmarked Tolerance: ±0.2mm
11. Requirements On Environmental Protection: RoHS



Backlight Circuit




SHENZHEN ENRICH ELECTRONICS CO., LTD.
TEL: +86-755-27864416, FAX: +86-755-27864653

NAME:	DATE:	MODEL NUMBER:	PROJECTION	SHEET:	1 OF 2
DESIGN BY: Liu Gong	2019-4-9	ENH-SS916007-01-VVNTKF			
CHECKED BY:					
APPROVED BY:					
DEFAULT UNITS: mm					
				NAME:	LCM

由 Autodesk 教育版产品制作

A2

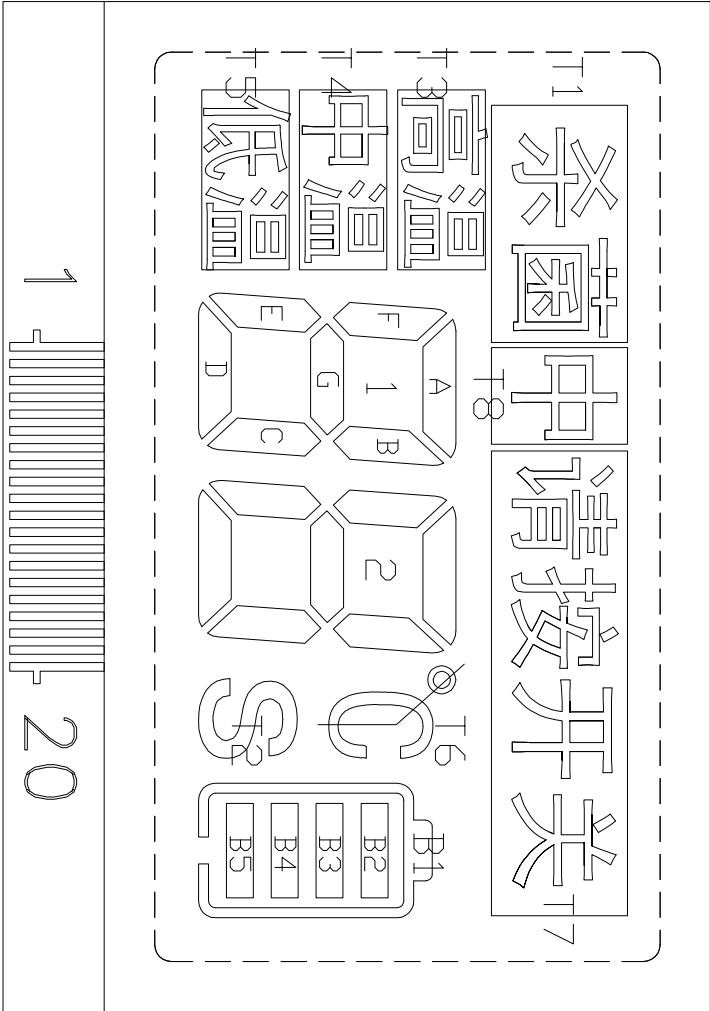

A2

PIN	1-3	4	5	6	7	8	9	10	11	12	13	14	15-20
COM1		COM1				T1	T8	1A	T7	2A		B2	
COM2			COM2			T3	1F	1B	2F	2B	B1	B3	
COM3				COM3		T4	1G	1C	2G	2C	T6	B4	
COM4					COM4	T5	1E	1D	2E	2D	T2	B5	



SHENZHEN ENRICH ELECTRONICS CO., LTD.
TEL: +86-755-27864416, FAX: +86-755-27864653

NAME:	DATE:	MODEL NUMBER:		PROJECTION		NAME:	SHEET:
DESIGN BY:	2019-4-9	ENH-SS916007-01-YVNTKF				NAME:	2 OF 2
CHECKED BY:							
APPROVED BY:							